



MODEL

XIS100

Integration Dock for iPod

INSTALLATION INSTRUCTION

DESCRIPTION

Xantech's 'XIS100' docking station is the industry's first iPod docking station designed for the high-resolution television revolution. It features a unique component video output capability that will enable owners of the new 480P video output iPods to see their video in full native resolution on a plasma, LCD, or other compatible TV screen with component video output. The 'XIS100' features a unique on-screen menu display and control system and is compatible with the latest iPod video technology.

KEY FEATURES

- Stand-Alone iPod Dock
- Stylish Remote with Hi-End Chrome Design
- Compatible with All Current iPods (iPod Classic, iPod Touch, Nano 3g etc...)
- Allows Menu Viewing and Control Direct from Any Viewing Monitor (i.e. Plasma, LCD Projector etc.)
- COMPONENT Video and Composite Video Output
- RS232 and IR Controllable
- Touch Panel Support
- Multi-Language Menu Support
- Direct IR Input on Rear
- Works as Stand Alone or Via On-Screen Video Display
- Album Art Display
- Metadata to and from Xantech CSPLCD Displays with Multi Line Display (or to XTR39 with New RF2IR2w)
- Single Line Metadata Display with Xantech MRC Keypads
- Threaded Inserts for Secure Mounting in Public Places

PACKAGE INCLUDES

- Component Video Cables
- Composite Video and Audio Left & Right Cable
- Power Supply with North America, Europe, UK, and Australia/New Zealand Adapters
- XIS100 Docking Station
- XIS100 Remote Control
- Instruction Manual
- DB9 to RJ45 Adaptor

QUICK START

STEP 1:

Connect the XIS100 to the power supply and use the included A/V cable to connect to a composite video and audio amplifier.

Direct the included remote control to the XIS100 and press the 'power' button. The ring on the XIS100 will light 'on'. Be sure the remote control has batteries installed.


With a connected display and the XIS100 powered on, the screen on the right will appear indicating no iPod has been connected to the XIS100.



STEP 2:

Once an iPod has been connected to the XIS100, the screen on the right will appear showing the main menu options.

The menu is similar to the iPod menu and all functions can be selected using the remote control.

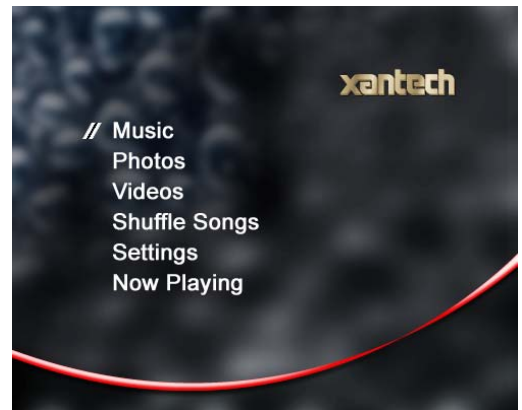


STEP 3:

The 'settings' menu page is unique to the XIS100. On this page, the screensaver time out, color scheme, and language can be changed.

On the color scheme selection, there are five schemes to select from.

On the language selection, there are eight different languages to select from.

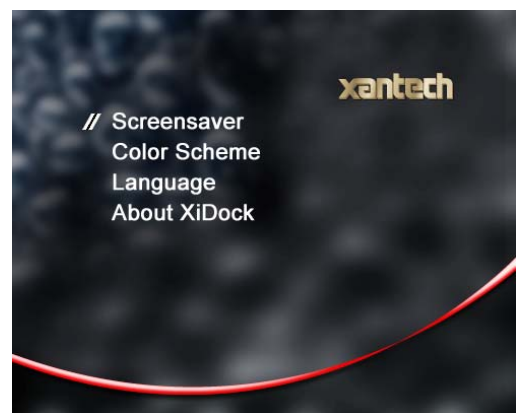

REMOTE CONTROL



UPPER PART		
MENU	Home	Whenever pressing this button, you can go back to the Main Menu.
	Power	Press it to power on and off.
SELECT PART		
SELECT	Select	When you decide to select a item, press it to enter or play it.
	Select UP/ DOWN	When you are in a menu, press them to go up and down and select what you want.
	Previous Page	Press it and you can return to the previous page.
	Next Page	Press it and you can enter the next page.
ADJUST PART		
	Volume UP/ DOWN	Press them to adjust the volume.
	Previous Track	Press it to go back to the previous track.
	Next Track	Press it to go to the next track.
	Play/ Pause	Press it to start playing and get pausing.
BOTTOM PART		
MUTE	Mute	Turn to the Mute state.
REPEAT	Repeat	Press it once and the now-playing song will be repeated. Press it twice and the songs in the folder will be repeated. And press it again (the third time) and you can remove.
SHUFFLE	Shuffle	Press it to “randomly” play the songs in the same folder. repeat mode.

BASE STATION – FRONT VIEW



BASE STATION

1	Dock Well	Connects to the iPod connector. Gently slide the iPod unit into the vertical connector and verify it is not tilted. Included with the XIS100 is a Dock Well adaptor for smaller iPod units.
2	IR Eye	Discreetly hidden is a front panel IR eye used to communicate with the XIS100 remote control. Be sure the remote control is directly towards this lens.

BASE STATION – REAR VIEW



BASE STATION

3	Video Format	This selector switch is used to select NTSC or PAL format.
4	IR IN	Modulated IR input use to connect to a Xantech IR bus system.
5	RS232/422	Port to connect to RS232 or RS422 communications devices. To change between 232 and 422, use the on-screen 'settings' menu.
6	Component Out	Component video output to be connected to a display.
7	A/V Output	Composite video and Left & Right Audio output Use included cable adaptor to break-out RCA connections. Audio output is always active. Composite and component video selection is made using the on-screen 'settings' menu. Only one video format can be active.
8	Power In	Power input using wall adapter power supply.

CONTROL COMMANDS – RC68X IR COMMANDS

The RC68+ should be set to Group Code “B9”.

	Key Definition	RC68X
1	Menu	80
2	Power	90
3	Up	20
4	Left	E0
5	Select	48
6	Right	A8
7	Down	08
8	Volume Up	F0
9	Volume Down	98
10	Play/Pause	10
11	Forward	A9
12	Rewind	89
13	Shuffle	68
14	Repeat	C8
15	Mute	38
16	Power On	C9
17	Power Off	E1
18	Component Video Output	00
19	Composite Video Output	C0
20	Artist	50
21	Album	D0

CONTROL COMMANDS – RS232 SERIAL STRING COMMANDS

See document 089051XXX – XIS100 Serial Protocol. Available on www.xantech.com

Limited Warranty

Xantech® warrants its products to be free of defects in materials or workmanship. This is a Limited Lifetime warranty from the date of purchase by the original consumer. Any products returned to Xantech and found to be defective by Xantech within the warranty period will be repaired or replaced, at Xantech's option, at no charge. Xantech will not be responsible for the actual cost of installation or removal of the product, nor for any incidental or consequential damages. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation may not apply to you. This warranty gives you specific legal rights. You may have additional legal rights that vary from state to state.

Xantech Corporation

13100 Telfair Ave. 2F, Sylmar CA 91342 | Xantech.com

Installation Instructions, XIS100 © 2008 Xantech Corporation
Document # 08905180X1

This document is copyright protected. No part of this manual may be copied or reproduced in any form without prior written consent from Xantech Corporation. Xantech Corporation shall not be liable for operational, technical, or editorial errors/omissions made in this document.